


# HIGH-TEMPERATURE FILTERS TYPE HITEMP



EFFICIENT AND RELIABLE  
AT HIGH TEMPERATURES

FILTER TYPE	FILTER CLASS TO ISO 16890	FILTER CLASS TO EN 779:2012
HT10	ISO ePM10 75%	M6
HT2.5	ISO ePM2,5 75%	F8

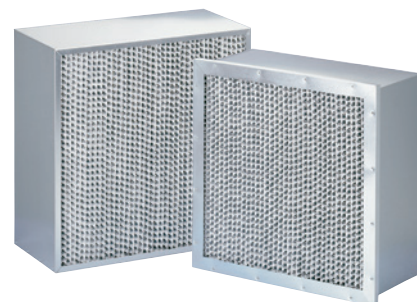

## The application

The principal application for the Viledon® HT10 and HT2.5 High-Temperature Cassette Filters with an overall depth of 292 mm is air filtration in recirculated-air systems used for paint-drying processes in the automotive industry. The filters meet particularly stringent requirements for air purity, process reliability and cost-efficiency.

Besides the applications in surface treatment technology, the filters also meet the toughest of quality stipulations in general drying applications.

## The characteristics and benefits

- The filters are available in two frame versions made of galvanized steel sheet: the box type (Type B), and the version with a flanged-on, 25-mm-thick front frame (Type H).
- Both versions are fitted with protection grids made of galvanized steel mesh on both sides, thus ensuring safe and simple handling.

- The filter media used are pleated micro-glass-fiber papers with different fiber finenesses for Filter classes ePM10 75% and ePM2,5 75% (ISO 16890). The corrugated aluminium separators with crimped edges, in conjunction with double-layered filter paper at the pleats, provide maximized mechanical strength. This increases production dependability for the user.
- The filters are fitted with a thermally ultra-stable, abrasion-proof textile-glass round cord seal, either on the upstream or downstream side, as a standard feature. The box versions of these filters can be installed from both up- and down-stream side which reduces stock levels and filter variants.
- They are thermally stable up to at least 260 °C.
- Viledon® High-Temperature Cassette Filters satisfy the stringent requirements of Fire class F1 to DIN 53 438

and are thus self-extinguishing. They are also highly resistant to solvent vapors and are silicone-free.

- In addition to the standard versions, special variants with different dimensions or frame materials, higher thermal stability or special reinforcement, are available on request.


## The special features

- Viledon® High-Temperature Cassette Filters with the HiTemp product group excel in terms of especially high dust holding capacity and very good mechanical sturdiness, even when exposed to inhomogeneous air loadings.
- Thanks to low filter resistance values, very long useful lifetimes can be achieved coupled with exceptionally cost-efficient operating characteristics.


GEOMETRIES AVAILABLE		BOX FORM (B) HT10   HT2.5 1/1	BOX FORM (B) HT10   HT2.5 1/2	WITH FRONT FRAME (H) HT10   HT2.5 1/1	WITH FRONT FRAME (H) HT10   HT2.5 1/2
Nennvolumenstrom	m³/h			3,400	
Dimensions	mm	610×610	305×610	592×592	287×592
Overall depth	mm			292	
Weight, approx.	kg	12	7	12	7
Filtering area, approx.	m²	15	7.5	12	6
Thermal stability	°C			260	

# TECHNICAL FILTER TEST DATA TO EN 779 AND ISO 16890

Fractional collection efficiency curves

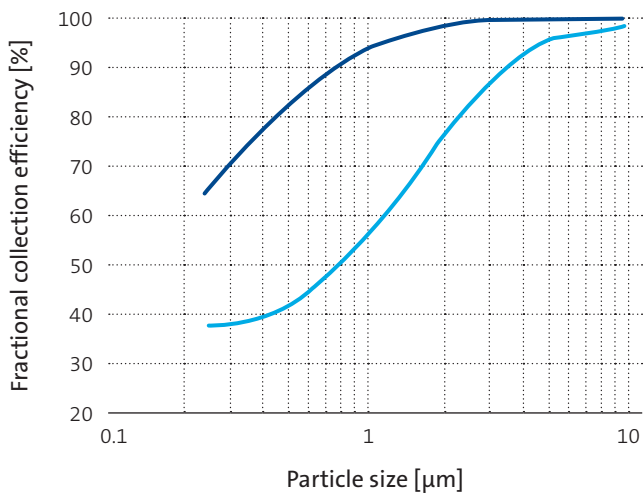

Initial pressure drop curves

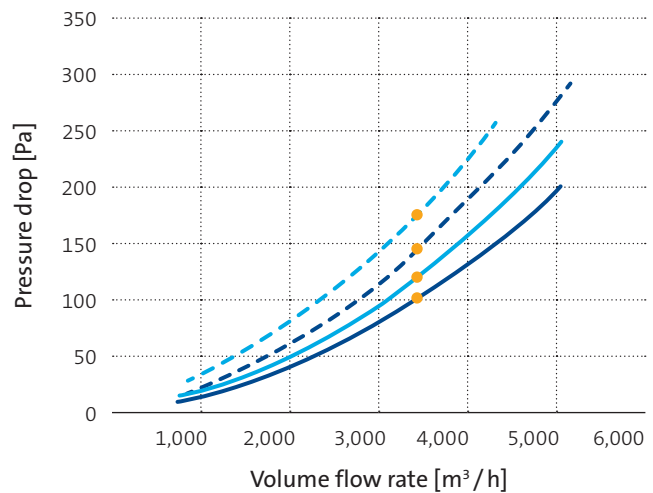

— HT 10 B    — HT 2.5 B    - - HT 10 H    - - HT 2.5 H    ● Nominal volume flow rate

KEY DATA		HT 10 B 1/1	HT 10 H 1/1	HT 2.5 B 1/1	HT 2.5 H 1/1
Nominal volume flow rate ●	m <sup>3</sup> /h	3,400			
Initial pressure drop	Pa	100	140	120	150
Class to ISO ISO 16890		ISO ePM10 75%		ISO ePM2,5 75%	
Particulate matter efficiency					
ISO ePM1		30		79	
ISO ePM2,5	%	42		84	
ISO ePM10		75		95	
Cut-off particle size	µm	8		4	
Filter class to EN 779:2012		M 6		F 8	
Recom. final pressure drop*	Pa	300			
Dust holding capacity approx. AC fine up to 300 Pa	g	520	420	520	420

FRAME VERSION	SIZE	INSTALLATION FROM	DESIGNATION / ORDERING CODE
Box variant galvanized steel sheet	1/1	both sides	HT 10-B-610x610x292-U-L
	1/2	both sides	HT 10-B-305x610x292-U-L
With front frame galvanized steel sheet	1/1	raw air side	HT 10-B-592x592x292-1-L
		clean air side	HT 10-B-592x592x292-2-L
	1/2	raw air side	HT 10-B-287x592x292-1-L
		clean air side	HT 10-B-287x592x292-2-L
Box variant galvanized steel sheet	1/1	both sides	HT 2.5-B-610x610x292-U-L
	1/2	both sides	HT 2.5-B-305x610x292-U-L
With front frame galvanized steel sheet	1/1	raw air side	HT 2.5-B-592x592x292-1-L
		clean air side	HT 2.5-B-592x592x292-2-L
	1/2	raw air side	HT 2.5-B-287x592x292-2-L
		clean air side	HT 2.5-B-287x592x292-1-L

\* For cost-efficiency or system-specific reasons it may be appropriate to change the filters before reaching the final pressure drop stated. It can also be exceeded in certain applications.

The figures given are mean values subject to tolerances due to the normal production fluctuations. Our explicit written confirmation is always required for the correctness and applicability of the information involved in any particular case. Subject to technical alterations. You will find instructions on how to handle and dispose of loaded filters in our information on product safety and eco-compatibility.